

Tilting Quick Coupler

Proven, Durable
& Trusted for
Generations




Tilting Quick Coupler

SIMPLE,
PROVEN DESIGN WITH
LOW MAINTAINANCE



Features & Benefits

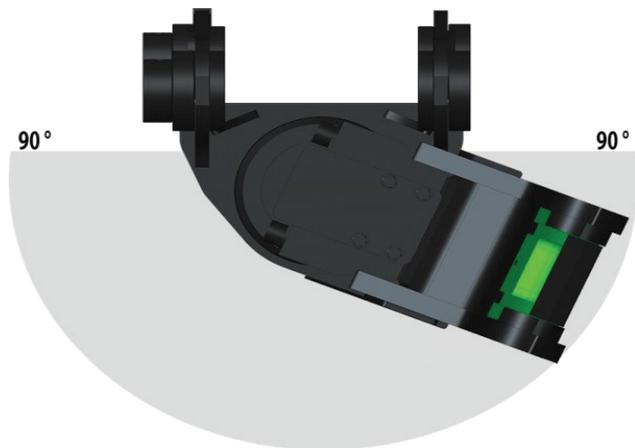

Tilt any bucket or attachment up to 180°

Available for 2 - 27 ton excavators

ISO13031 Compliant Quick Coupler



No Exposed Cylinders

Variable pin centre design

Proven technology exceeds current safety standards

Durable, compact design minimises tip radius extension

Integrated cross port relief valve to protect the internal seals

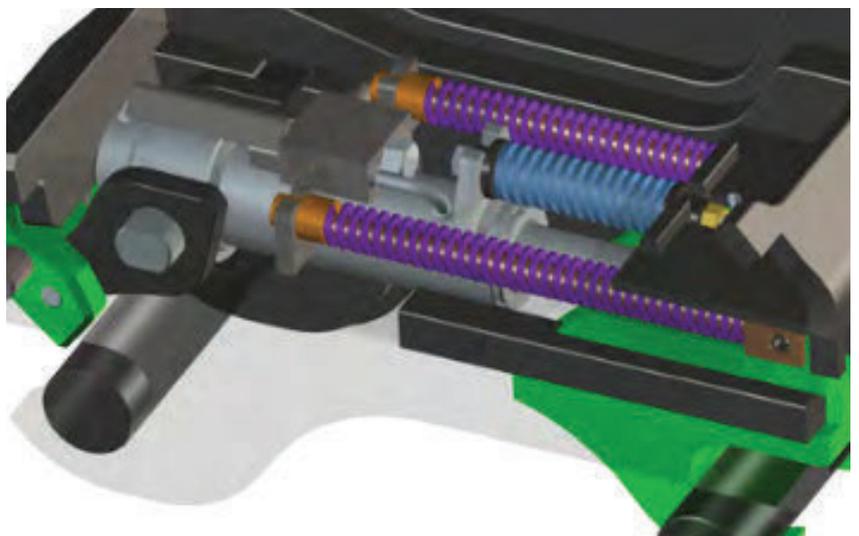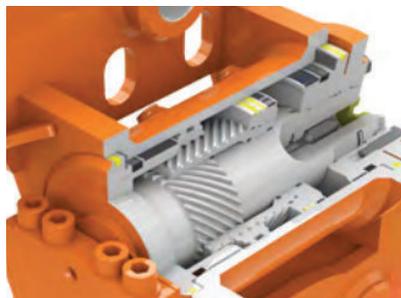

Safe & Versatile



SAFETY

Front & Rear Safety Locks backed up by two powerful springs which retains the attachment rear pin in case of cylinder failure

Powerful spring activated safety locks work in all dirty environments unlike gravity systems

VERSATILITY

Dig level foundations without having to level the machine tracks

Carry out landscaping with minimum disruption to the ground

Reduce waste and manual labour when filling pea gravel around pipes and manholes

Carry out rock breaking at the sides of deep trenches where standard couplers can't reach

Expand the working envelope of the machine when hedge or brush cutting

Ability to reverse buckets to allow the operator to excavate against walls and under pipes

Technical Specifications

EXCAVATOR WEIGHT (tons)	PIN DIAMETER (mm)	COUPLER MODEL (H) Hydraulic
1-2	25 / 30	QC25-30H
2-4	35 / 40	QC35-40H
4-8	45 / 50	QC45-50H
7-12	50 / 55 / 60	QC50-55-60H
12-16	60 / 65	QC60-65H
16-25	70 / 80	QC70-80H
24-35	90	QC90H
30-36	100	QC100H
33-36	110	QC110H

